

FLUID-setral-STG 220 FD



Fully synthetic high temperature chain oil of the **MolyGold**[®] series.

APPLICATION: Lubrication of transport-, drive- and cam shaft chains up to +260°C in the food and pharmaceutical industry

ADVANTAGES:

- * NSF – H1 registered
- * Extremely high flash point
- * Low evaporation losses
- * Chemically and age resistant, also in aggressive circulating air
- * Excellent wear protection with low friction rates
- * Adhesive additives avoid dripping or spinning off
- * Outstanding creeping and penetrating properties
- * High hydrolytic stability
- * Excellent corrosion protection
- * Silicone free

METHOD OF USE: Clean lubrication points thoroughly prior to application.
Apply product by brushing or dipping.
Suitable for central lubrication systems.


PACKAGING: 200 l drum
1000 l bulk (IBC) (other packing upon request)

ARTICLE-NO.: 0672

TECHNICAL DATA:

Colour:	light yellow		
Base:	combination of synthetic oils		
Density, 20 °C:	0,910	g/cm ³	DIN 51757
Viscosity, 40 °C:	255	mm ² /s	DIN 51562
Viscosity, 100 °C:	32	mm ² /s	DIN 51562
Viscosity index:	> 160		ISO 2909
Flash point:	> +300	°C	ISO 2592
Copper corrosion:	1-150	rating	EN ISO 2160
Pour point:	- 30	°C	ISO 3016
Temperature range	-25 up to + 260	°C	
NSF-Registration No.:	144573		

Evaporation loss at 220°C

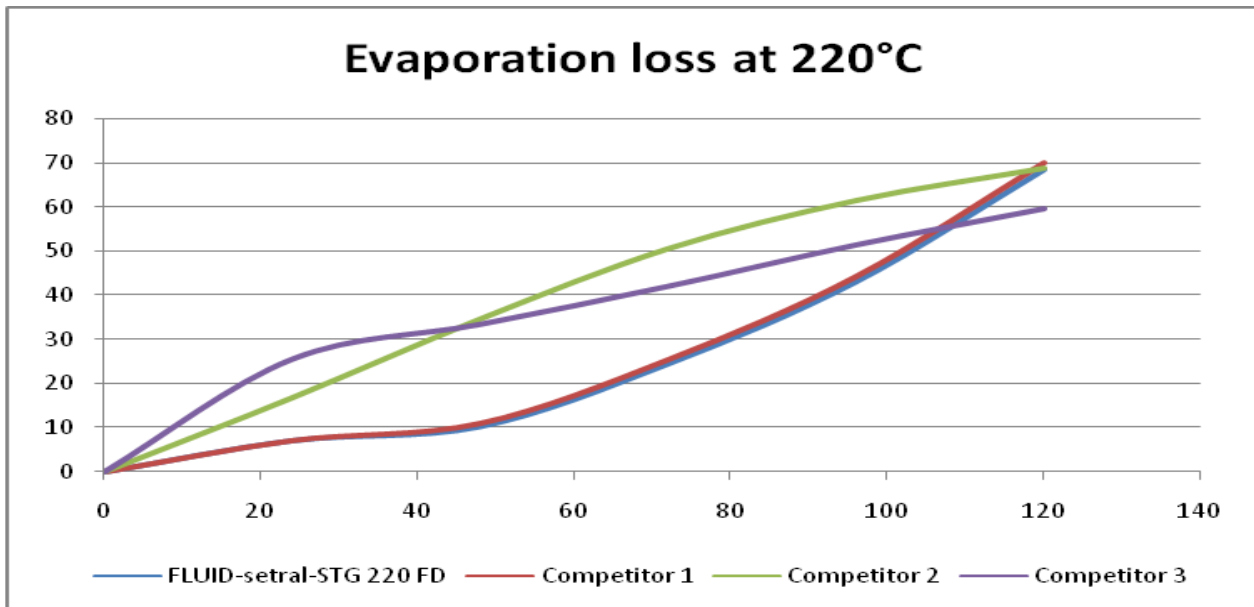

The information in this bulletin is, to our knowledge, true and accurate, but all recommendations are without guarantee, since the conditions of use are beyond our control. Setral disclaims any liability incurred in connection with the use of these data or suggestions. Furthermore, nothing contained herein shall be construed as a recommendation to use any product in conflict with existing patents covering any material or its use.

0672e / 010711rev03

Setral Chemie GmbH
Salzsteinstrasse 4
D-82402 Seeshaupt
Telefon : +49 (0) 88 01 97 10
Telefax: +49 (0) 88 01 97 30
Email: info@setral.net

www.setral.net

Sétral S.à.r.l.
13, rue Tannmuhle
F-67310 Romanswiller
Téléphone: +33 (0) 3 88 59 11 59
Télécopie: +33 (0) 3 88 59 11 57
Email: france@setral.net